

COMPACT TRACK LOADER

**takeuchi**<sup>TM</sup>  
From World First to World Leader

# TL12R-2



Operating Weight: 5,710 kg

# Product Features & Specifications

## ENGINE

- EU Stage IV / EPA Tier 4 Emission Compliant
- Turbocharged and Intercooled
- DOC+DPF+SCR Exhaust After Treatment
- Active Power Control Power Management System
- ECO Mode
- Foot Throttle Control
- Automatic Fuel Bleed System
- Extended Life Coolant
- High Capacity Radiator, Hydraulic Oil Cooler and Intercooler Mounted Side-by-Side on Swing Out Frame
- Double Element, Air Cleaner

## ELECTRICAL

- 12 volt System with 80 amp Alternator
- Heavy Duty, Quick Access Battery
- LED Work Lights, Front and Rear
- 5.7" Color Multi-Informational Display with Rear View Camera
- Sealed Rocker Switches
- Back-up Alarm
- Horn

## UNDERCARRIAGE AND FRAME


- 450 mm Quiet Track Design with Flotation Tread
- Long Track Frame
- Fully Welded Frame with Integrated Cross Members
- Rear Bumper Integrated into Frame
- Front and Rear Tie-Down and Lift Points
- Double Reduction Planetary Track Drives
- 2-Speed Travel

## OPERATOR'S STATION

- Deluxe High Back Adjustable Suspension Seat
- Rear Pivoting Seat Bar with Integrated Arm Rests
- Retractable 2" Seat Belt
- ROPS/FOPS Structure
- FOPS Level 2 Roof Guard Kit (optional)
- Polycarbonate Front Door (optional)
- Pressurized Cab with Roll-up Door, Air Conditioning, Heat, Defrost, Front Wiper and AM/FM/MP3 Radio (Cab Only)
- Rear Wiper (Cab Standard Equipment in Europe Only)
- 3 Point Seat Belt (optional)

## HYDRAULIC & WORKING EQUIPMENT

- Power Radial Arm Design
- Lower Front Cross Member
- Cushioned Arm Cylinders
- Arm Float with Detent
- Hydraulic Joystick Controls
- Proportional Auxiliary Controls with Detent
- Pressure Relieving Flat Faced Coupler Body
- Hydraulic Self Leveling (ON/OFF)
- Mechanical Quick Hitch
- 14-Pin Connector with Push Button Control (optional)
- Hydraulic Quick Hitch (optional)
- High Flow Auxiliary Hydraulics 153.0 L/min (optional)
- Secondary Auxiliary Circuit 88.0 L/min (optional)
- Ride Control (optional)
- Pattern Change Valve (ISO or H) (optional)

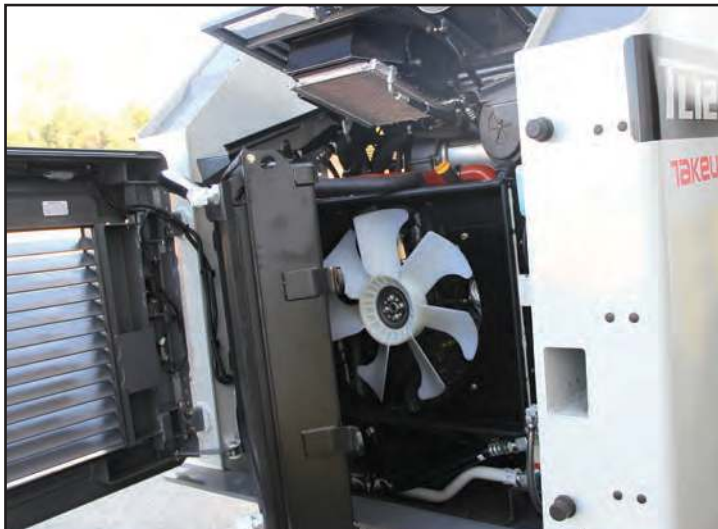

Convenient Service and Maintenance Access



Integrated Undercarriage

# TOUGH, POWERFUL, RELIABLE



Pilot Operated Controls



Battery Access Panel



Lower Cross Member & Step



Oversized Arm Cylinders

The TL12R-2 features a radial arm loader arrangement, and demonstrates Takeuchi's continued commitment to product improvement and innovation. It features a completely redesigned operator's station with a 5.7" color multi-information display excellent feature set, and updated rocker switches that control a wide range of machine functions.

Cab models have a smooth, low effort overhead door that improves entry and egress and enables the loader to be operated with the door in the raised or lowered position.

An updated undercarriage with a wide block quiet ride track system provides better flotation, improved ride quality, and a reduction in noise and vibration. A powerful, 81.8 kW engine meets the latest EU Stage IV / EPA Tier 4 emissions standards while delivering outstanding power and torque for impressive performance in the most demanding applications



Spacious operator's station with easy to reach controls and switches.

## OPERATING PERFORMANCE

Operating Weight - Canopy	5,580 kg
Cab	5,710 kg
Tipping Load	3,915 kg
Rated Operating Capacity (ISO 14397-1) @ 35%*	1,350 kg
Operating Load at 50% of Tipping Load	1,958 kg
Bucket Breakout Force	36.5 kN
Lift Arm Breakout Force	35.9 kN
Traction Force	62.3 kN
Ground Pressure - Canopy	32.0 kPa
Ground Pressure - Cab	32.7 kPa
Travel speed - Low	8.1 km/h
High	11.8 km/h

\* Operating capacity of compact track loaders is rated according to ISO 14397-1 at no more than 35% of the tipping load

## HYDRAULIC SYSTEM

Auxiliary Flow - Primary Circuit	88.0 L/min
Auxiliary Flow - High Flow (optional)	153.0 L/min
Auxiliary Flow - Secondary Circuit (optional)	88.0 L/min
Hydraulic System Pressure	24.0 MPa

## ENGINE

Make / Model	Kubota / V3800-TIEF4B
Engine Displacement	3,769 ml
Rated Output (ISO 14396)	81.8 kW / 2,400 min-1
Maximum Torque	379.3 Nm / 1,500 min-1

## FLUID CAPACITIES

Engine Lubrication	13.2 L
Cooling System	18.0 L
Fuel Tank Capacity	119.5 L
Hydraulic Reservoir Capacity	50.0 L
Hydraulic System Capacity	85.0 L
Diesel Exhaust Fluid (DEF)	18.0 L

## SAFETY AND HEALTH

Vibration Levels	
Hand / Arm	≤ 2.5 m/ S <sup>2</sup>
Body	≤ 0.5 m/S <sup>2</sup>
Noise Level	
Sound Power Level	LWA 104 dB



5.7" Color Display



Rear View Camera




LED Work Lights



Multi-Function Switch Bank

# TL12R-2 Compact Track Loader

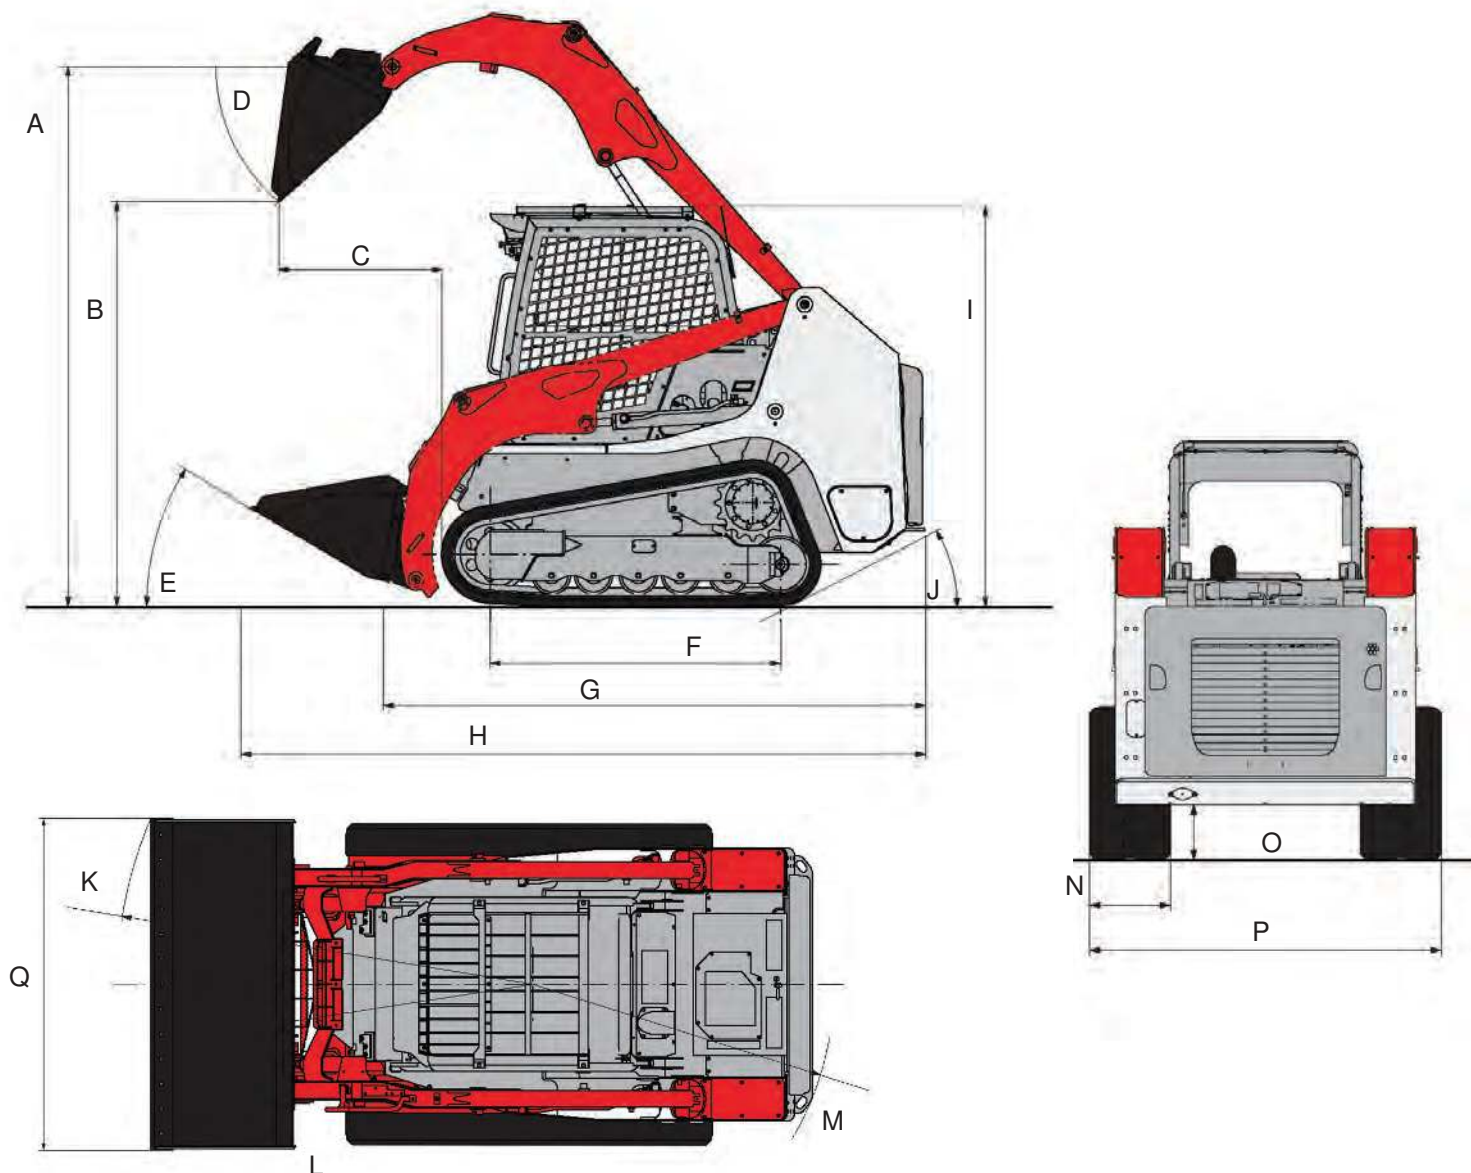

## MACHINE DIMENSIONS

A	Max. Lift Height to Bucket Pin	3,200 mm
B	Dump Height Fully Raised	2,400 mm
C	Dump Reach Fully Raised	960 mm
D	Dump Angle	40°
E	Rollback Angle	30°
F	Track Base	1,715 mm
G	Machine Length	3,205 mm
H	Transport Length	4,045 mm
I	Transport Height	2,330 mm
I'	Transport Height with Roof Guard	2,380 mm
J	Departure Angle	30°
K	Clearance Circle with Bucket	2,555 mm
L	Clearance Circle without Bucket	1,635 mm
M	Clearance Circle Rear	1,850 mm
N	Track Width	450 mm
O	Ground Clearance	320 mm
P	Overall Width without Bucket	1,960 mm
Q	Bucket Width	2,030 mm

