

**TORO**

# TREE CARE EQUIPMENT

STUMP GRINDERS / LOG SPLITTER / COMPACT UTILITY LOADER







# MAKE EASY WORK OF TOUGH STUMPS AND BRUSH.

Toro® tree care equipment is designed for maximum day-to-day productivity. These machines deliver the perfect combination of user-friendly operation and commercial-grade performance to keep operators working efficiently all day, every day. Even new users and first-time renters will quickly be comfortable operating these powerful products.



## **INNOVATIVE GRINDER TEETH**

Toro stump grinders feature quick-change grinder teeth that let you rotate to a new cutting edge in seconds. The innovative design enables the teeth to shear smoothly rather than shred for faster, more efficient cutting. Each tooth has three cutting edges for maximum durability, and teeth are interchangeable across the full Toro stump grinder line.

A man wearing a blue jacket and a yellow safety helmet with a face shield is operating a red Toro STX-38 stump grinder. The machine is positioned in a wooded area with many trees and a ground covered in dry leaves. The machine is actively grinding a stump, with wood chips and debris being ejected. The Toro logo is visible on the side of the machine's housing.

**STX-38 STUMP GRINDER**

**HIGH  
PERFORMANCE  
WITH AN EDGE**

# FROM PINE TO OAK, THE TORO® STX-38 TURN STUMPS TO CHIPS QUICKLY AND EFFICIENTLY.



Clearing tough stumps is a big job. The STX-38 makes that job faster and easier. Electronic Fuel Injection (EFI) and electric start deliver reliable power, easy starting and low maintenance. The all-hydraulic sweep control valve facilitates side-to-side feathering for superior stump grinding. And the frame design allows excellent cutter wheel visibility. At just 34" (86.4 cm) wide, the STX-38 easily fits through standard 36" (91.4 cm) gates and offers ground speeds of 4.5 mph (6.4 kph). That means you can spend more time grinding and less time transporting the machine for maximum productivity.

**PATENTED, EASY-TO-USE CONTROLS** are intuitive and easy to operate. One control for traction and a second for sweep, lift/lower and engagement of the grinder head, allowing for simple operation. Both the STX-26 and STX-38 have almost identical controls, which simplifies operation and training.



### CUTTER HEAD GUARDING

Cutter head and guard design allow for exceptional below-grade grinding and chip management.

## STX-38 FEATURES



### ELECTRONIC FUEL INJECTED (EFI) ENGINE

Kohler® Command PRO® EFI engine with electric start delivers reliable power and easy starting in cool weather. Also minimizes engine maintenance.



### INTELLI-SWEEP™ CUTTER HEAD CONTROL

Automatically adjusts cutting head sweep speed based on the load on the wheel, so the engine runs efficiently during heavy loads. This reduces machine stress, increases productivity and minimizes maintenance.



### ADVANCED CUTTER HEAD

Hydraulically driven head with 20 gpm hydraulic flow directly to cutter head for maximum performance. Design minimizes maintenance with no belts or pulleys to replace.



### HI-DRIVE TRACK SYSTEM

No tire ruts or flat tires! Low center of gravity and large footprint increase stability on hillsides. Tracks handle soft, wet ground conditions, climb curbs and allow zero-turn capability.

## STX-26 STUMP GRINDER



SIMPLE CONTROL  
**SERIOUS POWER**

# PRODUCTIVITY FOR THE DAILY GRIND.

Stump grinding should be simple, and it is with the Toro STX-26. Like the STX-38, it features Toro's patented Dingo® TX-style control system that's easy to learn and use. And the Intelli-Sweep™ cutter head control, plus a hydraulically driven head ensure optimal performance in the toughest conditions. This system also offers low maintenance, eliminating expensive belts that can break or slip. With a powerful Kawasaki® engine, tracks and transport speeds exceeding 4 mph (6.4 kph), the STX-26 gives you exactly what you need to get in and get to work fast.




**TORO'S PATENTED, EASY-TO-USE CONTROLS** offer smooth operation with fewer levers/knobs than conventional stump grinders. An armrest near the joystick also reduces operator fatigue.

- 1 Steering system (forward, reverse, turn) allows for zero-turn capability
- 2 Sweep, lift/lower and engagement of the grinder head

**OFFSET CUTTING HEAD** results in excellent visibility regardless of stump size.



## STX-26 FEATURES

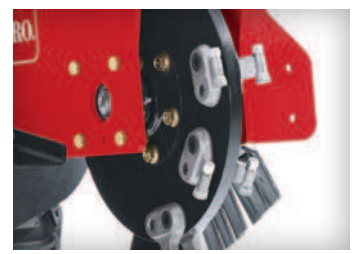

**ADVANCED CUTTER HEAD**  
Hydraulically driven head with 13.5 gpm hydraulic flow directly to cutter head for maximum performance. Design minimizes maintenance with no belts or pulleys to replace.



**INTELLI-SWEEP CUTTER HEAD CONTROL**  
Automatically adjusts cutting head sweep speed based on the load on the wheel, so the engine runs efficiently during heavy loads. This reduces machine stress, increases productivity and minimizes maintenance.



**INNOVATIVE TRACK SYSTEM**  
Low center of gravity increases stability on hillsides and uneven terrain. Tracks eliminate tire ruts and the risk of flat tires. They also allow zero-turn capability to reach difficult stumps.



**EASE OF OPERATION**  
Hydraulic sweep control valve facilitates side-to-side feathering. Greater maneuverability, ample power and a light footprint ensure maximum productivity.

A man wearing a blue jacket, blue jeans, and sunglasses is operating a red Toro SGR-13 stump grinder. The machine is positioned on a gravel path next to a tree stump. The background shows a green lawn and trees. The machine has a black engine with 'TORO' written on it and 'SGR-13' on the side. The man is holding the red handlebars and looking towards the machine.

**SGR-6 & SGR-13 HANDLEBAR  
STUMP GRINDERS**

**POWER IN A  
NIMBLE PACKAGE**



## ACCESS HARD-TO-REACH STUMPS WITH EASE.

Well balanced and easy to operate, Toro's SGR stump grinders are compact and maneuverable. Access harder to reach stumps and efficiently turn them into mulch. Each unit features convenient lift handles for easy loading and unique cutting technologies that combine smooth grinding with simple maintenance.

### SGR-6

Our smallest stump grinder for access to stumps in tight spaces. Cuts up to 10.4" (26.4 cm) above and 6" (15.2 cm) below grade.



### SGR-13

Powerful yet nimble enough to reach stumps near houses, other live trees and other tight spaces. Cuts up to 14" (35.6 cm) above and 11" (27.9 cm) below grade.

## SGR-6 & SGR-13 FEATURES



### SUPERIOR CUTTING PERFORMANCE

SGR stump grinders are well balanced, easy to operate and simple to maintain for the smoothest cutting.



### EASY LOADING AND TRANSPORT

Lift handles ensure easy loading and unloading. Foldable handle allows compact transport in an SUV, car, trunk or minivan.



### HEAVY-DUTY COMPONENTS

Heavy-duty centrifugal clutch is built to handle stump impact. Rubber gaskets between handle and frame help reduce vibration and operator fatigue.



### MANEUVERABLE DESIGN

Compact models allow you to access hard-to-reach stumps. Lightweight design makes it easy to transport the unit and move it into grinding position.

SGR-6 & SGR-13

# LS-922 LOG SPLITTER

## GREATER PRODUCTIVITY AND JOBSITE EFFICIENCY

---

A heavy-duty I-Beam, splitter wedge and torsion axle, along with a reliable engine, extend the longevity of the machine. With an easy to use control lever and a 12 second cycle time, the Toro Log Splitter provides greater productivity and jobsite efficiency. Added protection for the engine and tail lights help to minimize replacement part costs.



## LS-922 FEATURES

---



### DURABLE DESIGN

Strong I-beam and 9" solid steel splitting wedge add to the durability of the machine.



### INCREASED PRODUCTIVITY

Dual wheel jack provides better maneuverability over difficult terrain.



### EASY-TO-USE

The intuitive control lever is ideal for any experience-level user.



### MEETS TOWING STANDARDS

Tail lights and front amber lights meet US and Canadian towing standards.

# TORO® DINGO® COMPACT UTILITY LOADER ACCESSORIES

## DIG, HAUL, PLANT AND MUCH MORE WITH A SINGLE MACHINE.

In addition to our dedicated tree care products, we offer the versatile Toro Dingo. This compact utility loader works with a wide variety of attachments, so you can handle a range of tasks with one machine. Designed for professionals as well as homeowners and rental users, the Dingo delivers a high power-to-weight ratio with the lightest footprint in its category. The exclusive TX control system is also easy to learn, so operators can be instantly productive.



TORO DINGO



### GRAPPLE RAKE (MODEL 22577)

Grab, drag, lift and place brush and debris easily with up to 3,000 lbs (1,361 kg) of clamping force at the tine tips.



### STUMP GRINDER (MODEL 22429)

Great for getting into tight areas other grinders can't. Cuts up to 36" (91.4 cm) above and 16.5" (41.9 cm) below grade.



### BUCKET (VARIOUS MODELS)

Perfect for light-duty grading, leveling, and material handling. Standard 42" (107 cm) holds 4.3 cubic feet of material.



### MULTI-PURPOSE TOOL (MODEL 22672)

Tow, dig and break up soil with the 2-in-1: ripper and towbar.



### MANUAL OR HYDRAULIC FORKS (MODELS 22341 & 22438)

Transport and position trees and large shrubs exactly where you want them with exceptional maneuverability.



### HIGH TORQUE AUGER POWER HEAD (MODEL 22805)

Dig 30" (76.2 cm) holes up to 5' (153 cm) deep in the most challenging soil conditions. Excellent for shrubs and bailed-and-burlapped trees.

## HYDRAULIC STUMP GRINDER SPECIFICATIONS

	<b>STX-38</b> 23214	<b>STX-26</b> 23208
Engine	Kohler® Command PRO® E CV980 980cc EFI Engine	Kawasaki® FX-730V
Hydraulics	Dual hydrostatic traction drive – 16 cc hydropumps with 15 gpm max flow to each side; 20 gpm gear pump flow to the piston motor driving the cutter head	13.5 gpm hydraulic flow to head
Wheel	22.25" (56.5 cm) diameter to tooth; 1" (2.5 cm) thick; 16 grinder teeth	19" (48.2 cm) diameter to tooth; .75" (1.9 cm) thick; 12 grinder teeth
Cutter Depth	18" (45.7 cm) below grade	12.5" (31.7 cm) below grade
Cutter Height	35" (88.9 cm) above grade	33" (83.8 cm) above grade
Head Swing	52" (132 cm) arc length x 60° sweep arc	47" (119.3 cm) arc length x 90° sweep arc
Dimensions (W x L x H)	34" x 95" x 51" ( (86.3 x 241.3 x 129.5 cm)	34" x 78" x 46" ( (86.3 x 198.1 x 116.8 cm)
Weight	1,750 lbs (793.7 kg)	1,200 lbs. (544.3 kg)
Maximum Travel Speed	4.5 mph (7.2 kph)	4.2 mph (6.8 kph) Forward 1.6 mph (2.6 kph) Reverse

## HANDLE BAR STUMP GRINDER SPECIFICATIONS

	<b>SGR-6</b> 22600	<b>SGR-13</b> 22615
Engine	Honda® GX200	Honda GX390
Wheel	9.5" (24.3 cm) diameter to tooth; 3 grinder teeth	
Cutter Depth	6" (15.2 cm) below grade	11" (27.9 cm) below grade
Cutter Height	10.4" (26.4 cm) above grade	14" (35.5 cm) above grade
Dimensions (W x L x H)	22" x 50" x 42.3" (55.8 x 127.0 x 107.4 cm)	29.5" x 76" x 42" (74.9 x 193.0 x 106.6 cm)
Weight	103 lbs (46.7 kg)	240 lbs (108.8 kg)

## LOG SPLITTER SPECIFICATIONS

	<b>LS-922</b> 22618
Engine	Honda GX270
Cutting Force	22 ton
Cycle Time	12 seconds
Working Pressure	2,750 psi (18,960 kPa)
Dimensions (W x L x H)	51" x 97" x 45.5" (129.5 x 246.3 x 115.5 cm)
Weight	909 lbs (412.3 kg)



[facebook.com/toro.company](https://facebook.com/toro.company)



[instagram.com/TheToroCompany](https://instagram.com/TheToroCompany)



[twitter.com/TheToroCompany](https://twitter.com/TheToroCompany)



[youtube.com/toro](https://youtube.com/toro)

